

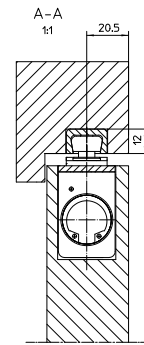
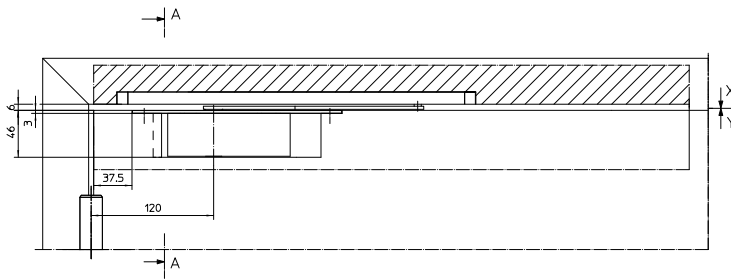


# New door control in detail. Information about GEZE ActiveStop.



## GEZE ActiveStop INTEGRATED

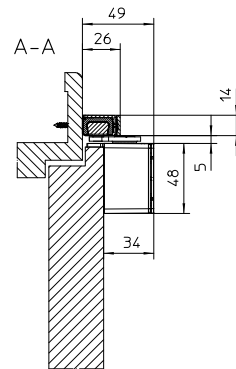

## GEZE ActiveStop SURFACE-MOUNTED - TIMBER DOOR

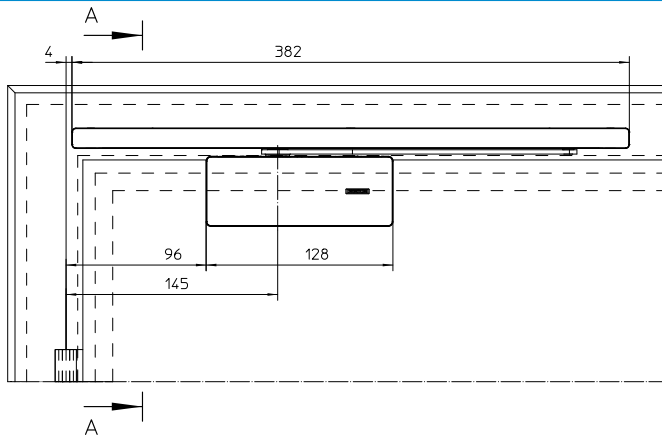

## GEZE ActiveStop SURFACE-MOUNTED - GLASS DOOR

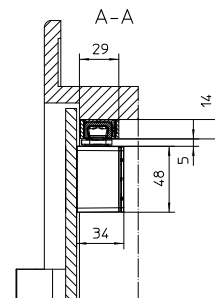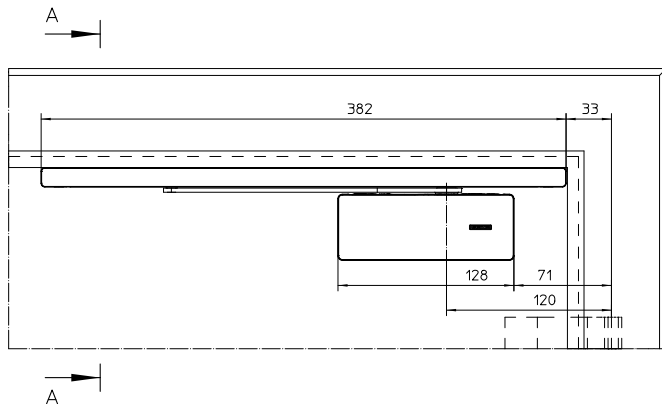

# Technical data

AREAS OF APPLICATION	GEZE ActiveStop integrated	GEZE ActiveStop surface-mounted
<b>Door type</b>	Timber interior doors, rebated and flush-mounted	Timber interior doors, rebated and flush-mounted; glass interior doors with timber frames Note: special accessories are needed for satin glass
<b>Leaf weight</b>	optimal function up to 45 kg	optimal function up to 45 kg
<b>Leaf width</b>	optimal function up to 1100 mm	optimal function up to 1100 mm
<b>Leaf thickness</b>	from 38 mm	for wood: at least 12 mm
<b>Lintel depth</b>		for glass: at least 29 mm
<b>Door hinge</b>	for DIN left and DIN right	for DIN left and DIN right
<b>Installation type</b>	concealed	fitted on the leaf, glass: opposite hinge side, wood: hinge side
<b>Rebate</b>	between door leaf and frame, approx. 6 mm clearance in handle area	
<b>PRODUCT FEATURES</b>		
<b>Damping and closing</b>	closing direction – starting from approx. 25° opening direction – starting from approx. 60°	closing direction – starting from approx. 25° opening direction – starting from approx. 60°
<b>Free swing area</b>	freely selectable door position – between 25° and 60°	freely selectable door position – between 25° and 60°
<b>Door opening angle</b>	with variable adjustment – between 80° and 140°	with variable adjustment – between 80° and 140° (wood) or 110° (glass)
<b>Damping strength</b>	can be set using a valve	can be set using a valve
<b>Protection against overload</b>	with integrated safety valve	with integrated safety valve
<b>Low-maintenance</b>	designed for maintenance-free operation in private room doors	designed for maintenance-free operation in private room doors
<b>ORDERING INFORMATION</b>		
<b>Source</b>	hardware dealers or pre-mounted door leaves and frames from specialist door dealers	hardware dealers or online via <a href="http://activestop.geze.com/en">activestop.geze.com/en</a>
<b>Order number</b>	163411 (ready-to-install complete set in silver)	184105 glass – simulated stainless steel 184091 glass – silver 184103 glass – white RAL 9016 184102 wood – silver 184104 wood – white RAL 9016 184106 wood – simulated stainless steel Other RAL colours available on request.
<b>Scope of delivery</b>	GEZE ActiveStop, guide rail with sliding block and end buffer, connection handle, universal door latch block, installation material	GEZE ActiveStop, guide rail with sliding block and end buffer, connection handle, universal door latch block, installation material, design cover
<b>Accessories</b>	165814 Fixing plates for guide rails 166886 Milling fixture 169725 Milled edge cover RAL 7035 169724 Milled edge cover RAL 9016 179624 Milled edge cover as per RAL	184109 Fastening set for special glass